



**FIREHORSE**  
*FULHAM*



# *Emergency / Exit Solutions*

## *Product Selection Guide*

Emergency Lights, Exit Signs, Combo Units & Running Man Signs



**2025 Edition**

Part Numbering Example



Symbol Key

Damp Location Rated	Wet Location Rated	LED Heads	Remote Head Capability
Sealed Lead Acid battery type	NiCd battery type	Ni-MH battery type	Spanish Faceplate Available
New York approved	Chicago approved	Self-Test/Diagnostic option	CEC Title 20 Compliant



# Emergency Lighting

Reliable, energy efficient emergency lights in a variety of styles and sizes



Series	Housing Color	Options
<b>FHEM10</b>	W = White, B = Black	H = High Lumen Reflector, W = Wet Location

Low profile, thermoplastic emergency lighting unit with adjustable LED lamp heads.




<b>FHEM10WHU</b>	W = White	Blank = Damp Location, W = Wet Location
------------------	-----------	---

Low profile, thermoplastic emergency lighting unit with adjustable LED lamp heads. Universal voltage operation: 120-277VAC. High lumen reflectors, cULus listed, wet location version available.



Dimensions

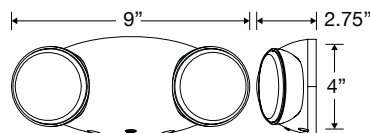

Damp Location Version




Wet Location Version




**FHEM12**

Series	Housing Color	Operation
FHEM12	W = White	Blank = Damp Location, W = Wet Location

Damp location rated LED emergency fixture (wet location model also available). UL Listed, Dual Voltage (120V or 277V). Maintenance-free 3.6V NiCd Battery, Push-to-Test Switch, adjustable glare-free heads, "snap fit" construction installs quickly. 90 min. emergency operation.



Damp Location Version





Wet Location Version



**FHEM16**

Series	Housing Color	Options
FHEM16	W = White B = Black	SD= Self-Diagnostic RC=Remote Capable


LED, dual voltage (120V/277V) emergency fixture with NiCd battery that operates for 90 minutes in emergency mode. UL listed and damp location rated, available in white or black and with self diagnostic and remote capable options available.

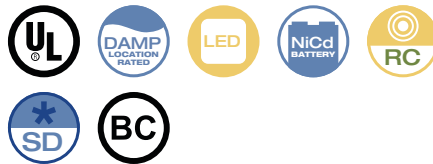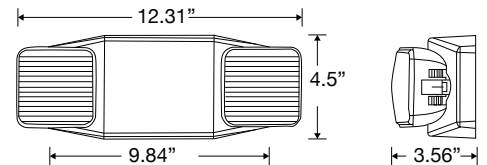

**FHEM17**

Series	Housing Color
FHEM17	W = White

Micro Adjustable LED Square-Head Emergency Lighting Fixture. High output of 800 lumens. Dual voltage 120V/277V. UL924 listed, Damp Location Rated emergency backup lights. NOM. BC.

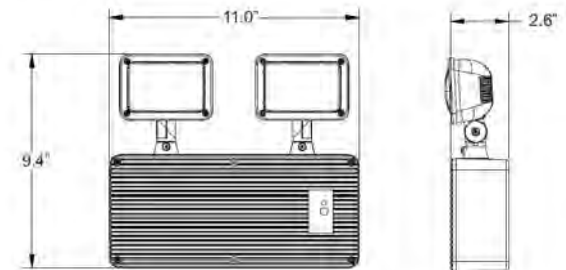




**FHEM18**

Series	Housing Color	Options
FHEM18	W = White	SD= Self-Diagnostic RC=Remote Capable

Thin High Lumen EM light FHEM18 of a familiar look/styling in a white housing. 600 Lumen output, remote capable option, self-diagnostic option.

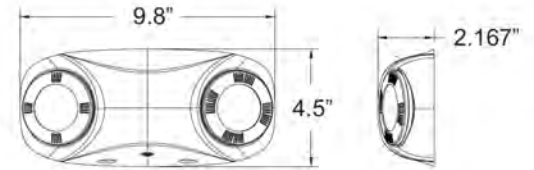

**LED Exit Signs**


Dependable LED exit signs with slim profile and edge-lit options



**FHEX20 – Thermoplastic Micro LED**

Series	Housing Color	Letter Color	Operation	Options
FHEX20	W = White B = Black	R = Red G = Green	AC = AC Only EM = Battery Back Up	RC = Remote Capable

Slim profile thermoplastic LED exit sign offers long lamp life, energy efficiency and uniform illumination in an economical package.






**FHEX21 – Thermoplastic LED**

Series	Housing Color	Letter Color	Operation	Options
FHEX21	W = White B = Black	R = Red G = Green	AC = AC Only EM = Battery Back Up	SD = Self-Diagnostic (EM Only)


Thin-profile, thermoplastic LED exit sign offers long life, energy efficiency and uniform illumination in an economical package.

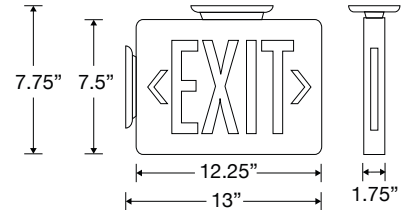

**FHEX23 – Recessed Edge Lit**

Series	Housing Color	# of Faces	Letter Color	Operation
FHEX23	A = Aluminum	S = Single D = Dual	R = Red G = Green	AC = AC Only EM = Battery Back Up


Architectural LED Edge-Lit exit signs recess into the ceiling, offering superior aesthetic appeal.



**FHEX24 – Surface Edge Lit**

Series	Housing Color	# of Faces	Letter Color	Operation
FHEX24	A = Aluminum W = White	S = Single D = Dual	R = Red G = Green	AC = AC Only EM = Battery Back Up


Ideal for architectural applications, surface mount Edge-Lit LED exit signs offer specification-grade aesthetics with in-field installation flexibility.



**FHEX26 – Slim Wet Location LED**

Series	Letter Color	Options
FHEX26	R = Red, G = Green	RC = Remote Capable HTR = Heater

Features a compact enclosure that is resistant to non-hazardous dust environments, corrosive atmospheres, hose-down water spray, or splashing water.

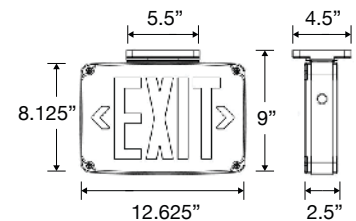




## Running Man Signage



### FHEU20 - Running Man LED Exit Sign

Series	Housing Color	Letter Color	Options
FHEU20	W = White	G = Green	

Single or double face with changeable legends. Comes standard with three pictogram legends for directional selection. cULus Listed, Damp Location Rated. 120VAC / 347VAC Input, Input Power 4W. High quality NiCad battery. Low power consumption and LED light source for reduced operation and maintenance costs. 75,000 hr life. High impact UV flame rated thermoplastic. Universal Mounting: Ceiling, wall or side mount.

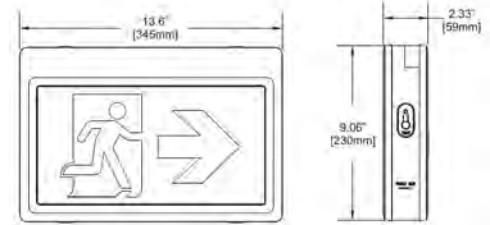

## Emergency Lighting / Exit Sign Combo


Versatile emergency light and exit sign combination units with remote head capability



### FHEC30 - Thermoplastic Micro LED Combo

Series	Housing Color	Letter Color	Options
FHEC30	W = White B = Black	R = Red G = Green	H = High Lumen Reflector


Energy-saving combination LED exit sign and emergency lighting unit in one compact, modern design.

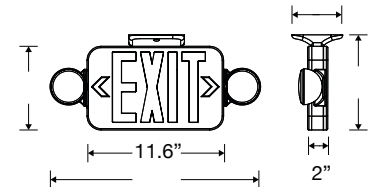

### FHEC33 - Thermoplastic LED Combo

Series	Housing Color	Letter Color	Options
FHEC33	W = White	R = Red G = Green	RC = Remote Capable

Injection molded, high impact, thermoplastic LED Exit Combo. Includes 2 factory-installed, adjustable square 12W high output LED heads.

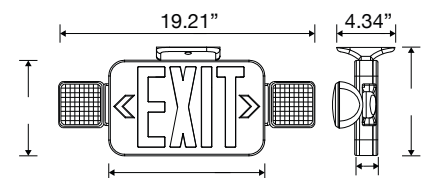




**FHEC34 - Slim Wet Location LED Combo**

Series	Letter Color	Options
FHEC34	R = Red, G = Green	RC = Remote Capable HTR = Heater


UL 924 listed for wet location. Includes two sealed and gasketed 1.17W weatherproof LED lamp heads. Features a compact enclosure that is resistant to non-hazardous dust environments, corrosive atmospheres, hose-down water spray, or splashing water.

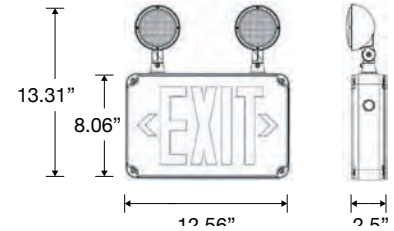

**FHEC35 - Thermoplastic Slim LED Fully Adjustable Combo**

Series	Letter Color	Options
FHEC35	R = Red, G = Green	SD= Self-Diagnostic*, RC=Remote Capable*

Slim profile, thermoplastic LED Exit/Emergency Combo. Includes standard faceplate and fully adjustable LED lamp heads, all in a slender package.

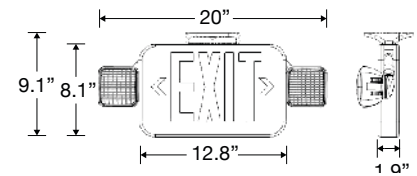

\*Options may be combined




## New York Approved Emergency Lighting / Exit Sign Combo



### FHNY11

Series	Description
FHNY11	9.6V, 3W, NiCd battery, two lamp heads


Steel emergency light with LED Heads designed for new or retrofit applications that need to meet New York City Standards. Ideal for hospitals, office buildings and schools.

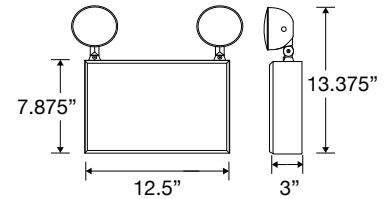

### FHNY31

Series	Description
FHNY31	Combo, 20-GA steel, white housing, single face, red lettering, Ni-MH battery, Three 9.6V, 3W LED lamp heads

Steel New York City approved LED exit sign and emergency unit combo with LED heads. Ideal for hospitals, office buildings and schools.





## Accessories

### Wire Guards

Model Number	FHEMWG	FHECWG
Compatible with	FHEM10 FHEM11 FHEM13	FHEC30 FHEC31



FHEMWG\*



FHECWG\*

\*Wire Guards Only; Fixtures Not Included

### Spanish Faceplates

Model Number	FHE30-20SFG	FHE30-20SFR
Compatible with	FHEX20 FHEC33	FHEC30 FHEC35

For FHEX21 and FHEC31, use option SF in part number



FHE30-20SFG



FHE30-20SFR



FHEM10RH1



FHEM10RH2



FHEM12RH1



FHEM12RH2



FHEM16RH1



FHEM16RH2

### Remote Heads

	Model Number	Heads	Voltage	Watts/Head	Compatible with
Low Profile Thermoplastic	FHEM10-RH1-3V1	1	3.6V	1.72	FHEM16, FHEX20, FHEC33, FHEC35
	FHEM10-RH2-3V1	2	3.6	3.4	FHEM16, FHEX20, FHEC33, FHEC35
Wet Location	FHEM12-RH1-3V1	1	3.6V	1.17	FHEX20, FHEX26, FHEC33, FHEC34
	FHEM12-RH2-3V1	2	3.6V	2.34	FHEX20, FHEX26, FHEC33, FHEC34
Low Profile Square Head	FHEM16-RH1-3V1	1	3.6	0.92	FHEM16, FHEX20, FHEC33, FHEC35
	FHEM16-RH2-3V1	2	3.6	1.84	FHEM16, FHEX20, FHEC33, FHEC35

# Contact US

---

Visit [www.fulham.com](http://www.fulham.com) for product information, sales representative contact info, technical documentation, and more.

## Fulham Headquarters (North America)

12705 S. Van Ness Avenue  
Hawthorne, CA 90250  
Tel: +1 323.599.5000  
Fax: +1 323.754.9060  
order@fulham.com  
www.fulham.com

## Fulham Client Services

Order processing, technical  
support, product information,  
requests for quotations  
Tel: +1 323.599.5000  
Fax: +1 323.794.9060  
order@fulham.com

## Fulham Warranty Department

Tel: +1 323.599.5001  
warranty@fulham.com

# U.S. Distribution Sales Support:

---

Contact [DSTSales@fulham.com](mailto:DSTSales@fulham.com)  
or your Fulham Regional Sales Manager



# Global Locations:

---

## India

### Fulham Pvt. Ltd.

201, Kaliandas Udyog  
Bhavan Sadanand Tandel  
Marg Century Bazaar Lane  
Prabhadevi,  
Mumbai-400025 Tel:  
+91.22.66388775-8  
sgaikwad@fulham.com

### Fulham Pvt. Ltd.

Survey No. 26-3  
Village Narhe  
Taluka Haveli, Dist: Pune -  
411041  
Tel: +91.20.24690703/4  
Fax: +91.20.24690712  
sgaikwad@fulham.com

## Europe

### Fulham Europe

sales.eu@fulham.com

## China

### Fulham Electronic Co.

Ltd. 6th Floor, Building #23,  
Champion Bio,  
No. 79, Shuangying West  
Road, Nanshao County,  
Changping District, Beijing,  
P.R.China, 102200  
Tel: +86-10-6073-5858  
order.china@fulham.com.cn

## Hong Kong

### Fulham Company Ltd.

Unit 6, 6/F Kowloon Plaza  
485 Castle Peak Road  
Cheung Sha Wan,  
Kowloon Hong Kong  
Tel: +852.2314.4801  
Fax: +852.2314.4186  
hongkongsales@fulham.com

